

Conduit Fittings- Reduced Bushing




Features

Zinc plated steel reducing bushings are used with rigid and IMC conduit to reduce the size of a threaded opening to accept a smaller size conduit.



Sizing and Features

Product	Size	Description	Qty	Sizes	
				A	B
G-RB75-50	3/4"-1/2"	Reducing Bushing	100	.65	.92
G-RB50-38	1/2"-3/8"	Reducing Bushing	100	.563	.75
G-RB100-75	1"-3/4"	Reducing Bushing	50	.715	1.125
G-RB100-50	1"-1/2"	Reducing Bushing	50	.715	1.125
G-RB125-100	1-1/4"-1"	Reducing Bushing	25	.82	1.47
G-RB125-75	1-1/4"-3/4"	Reducing Bushing	25	.82	1.47
G-RB125-50	1-1/4"-1/2"	Reducing Bushing	25	.82	1.47
G-RB150-100	1-1/2"-1"	Reducing Bushing	25	.85	1.70
G-RB150-75	1-1/2"-3/4"	Reducing Bushing	25	.85	1.70
G-RB150-50	1-1/2"-1/2"	Reducing Bushing	25	.85	1.70
G-RB200-150	2"-1 1/2"	Reducing Bushing	10	.97	2.23
G-RB200-125	2"-1 1/4"	Reducing Bushing	10	.97	2.23
G-RB200-100	2"-1"	Reducing Bushing	10	.97	2.23
G-RB200-75	2"-3/4"	Reducing Bushing	10	.97	2.23
G-RB200-50	2"-1/2"	Reducing Bushing	10	.97	2.23

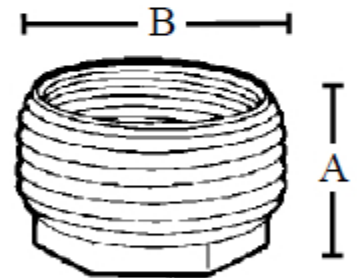

- Rounded Bushing Protects Conductor
- Used to Reduce the Entry Size of a Run of Threaded Conduit
- Dry Location Use Only
- Steel
- Zinc Plated

